


## DIGITAL HD-CVI and IP VIDEO RECORDER WITH PTZ CONTROL.



Picture above shows cameras as well PTZ control as presented on a PC via the LAN output. (Live or stored pictures)

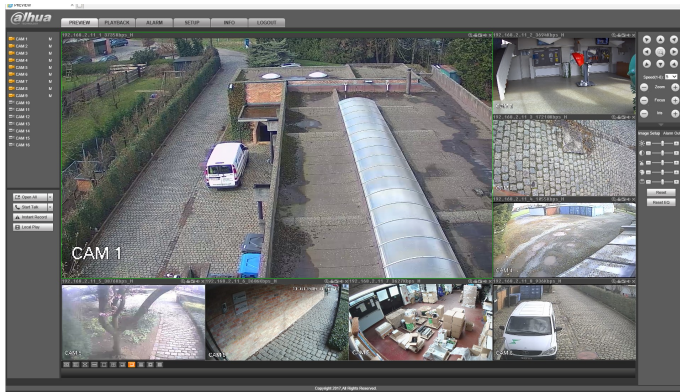

### **Model PR-DVR-1016/CVI**

(Model DVR-1004/CVI, DVR-1008/CVI and DVR-1032/CVI will have the same outline.)

### **FEATURES AND BENIFITS**

- HD-CVI, IP or standard PAL video camera recording 4, 8, 16 or 32 cameras.
- Built in hard disk up to 32TB internal and extra 16 TB external (Via eSATA).
- High resolution full HD recording with 2 HDMI monitor outputs.
- Remotes access by LAN or WAN.
- PTZ control using keypad or remotely using standard PC.
- Motion detection.
- Embedded Linux design resulting in lower maintenance.

The models DVR-1004/CVI up to DVR-1032/CVI are fully digital HD-CVI, IP or standard PAL video recorders allowing a maximum of 4, 8, 16 or 32 CCTV HD-CVI digital cameras simultaneous recording. The units may record and playback at the same time without loss of any information. The DVR's may operate and controlled completely alone standing using the push buttons on the front of the unit or remote controlled up to 1Km away using a RS485 keyboard with joystick or by access via LAN network..

### Specifications.

	<u>PR-DVR-1004/CVI</u>	<u>PR-DVR-1008/CVI</u>	<u>PR-DVR-1016/CVI</u>	<u>PR-DVR-1032/CVI</u>
Maximum cameras	4	8	16	32
Construction	Metal housing colour grey, front blank aluminium.....			
Power supply	.....100 to 240VAC /50-60HzHz at 30Watt (without HDD).....			
Video input	.....HD-CVI at1080P at 75 Ohm.....			
Through loop BNC	No	No	No	No
Video output	1xHDMI, 1xVGA, 1Xtv	1xHDMI, 1xVGA, 1xTV	2xHDMI, 1xVGA, 1xTV	2xHDMI, 1xVGA, 1xTV
Diplay split (multiscreen):	1- 4	1-4-8-9	1-4-8-9-16	1-4-8-9-16
Storage disk	:Max 8Tb (2HDD of 4TB/ea)	Max 32Tb (4HDD of 8TB/ea)	Max 32TB (4 HDD of 8TB/ea)	Max 32TB (4 HDD of 8TB/ea) internal and 16TB external via eSATA connector
Compression	.....H.264+/G.711.....			
Recording speed	.....1image every 10sec adjustable per camera up to 25 images per second (ips) per camera.....			
Connection	.....Connection to Ethernet, TCP/IP and provide for PTZ control of movable cameras.....			
Operating temp.	.....5°C to 40°C and max. 90% humidity.....			
Protection	.....IP23.....			
Approvals	..... CE mark.....			
Dimensions (WxHxD):	.....440x76x417mm (1,5U height and 19") .....			
Shipping weight	.....7Kg (excluding HDD).....			