

## CAMERA CONTROL UNIT FOR TIN BATH.



**Model CCP- 001 Tin bath camera control unit**  
(Right side panel. Left side panel will have same layout.)


Flat cable 2 meter long included.

### FEATURES AND BENEFITS

- Maximum seven (7) cameras.
- Joy stick for control of EXIT camera.
- Built in "Temperature" alarm.
- Zoom, focus and iris control.



**Example of Installation of water-cooled camera control panels and video monitors.**

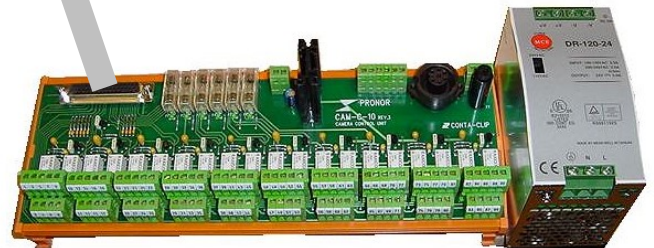

**Model CAM-C-10 Control/power supply**

Above camera control unit is ideal for controlling water-cooled cameras with a remote zoom lens for float glass survey into a Tin bath.  
One panel model CCP-01 with control/power supply model CAM-C-10 will operate a maximum of 7 left side cameras. The second panel with his corresponding CAM-C-10 will drive an identical quantity on the right side.  
The CCP-01 panel is connected with a flat cable of 2-meter long (25 pole connector) to their control/power supply unit model CAM-C-10.

### Specifications.

Construction : Aluminium front plate with burned in texts.  
Mounting : CCP-001 control panel: Flush mounted. CAM-C-10: DIN rail mounted  
Power requirements: drawn from the CAM-C-10 what requires 120VAC-230VAC/50-60Hz or 24VDC/5A  
Cabling : Done by pre-fixed 2-meter long flat cables between panel and CAM-C-10.  
Protection : IP23  
Temperature range : 0C° to +40C°. (95% humidity)  
Dimensions (HxWxD): Control panel 185x290x90mm. Weight 1 Kg CAM-C-10: 385x120x95mm. Weight 3Kg  
Cut out dimensions: H=159 W=272mm